TECHNICAL NOTE

D-1598

DESIGN, OPERATION, AND TESTING CAPABILITIES OF THE

LANGLEY 11-INCH CERAMIC-HEATED TUNNEL

By Otto F. Trout, Jr.

Langley Research Center
Langley Station, Hampton, Va.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

WASHINGTON   February 1963

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

TECHNICAL NOTE D-1598

DESIGN, OPERATION, AND TESTING CAPABILITIES OF THE

LANGLEY 11-INCH CERAMIC-HEATED TUNNEL

By Otto F. Trout, Jr.

SUMMARY

Supersonic air jets and tunnels, suitable for performing materials research, rodynamic testing, and heat-transfer studies, have been designed and built and upled with a ceramic heat exchanger which operates up to 4,500° R. Details for e ceramic heat exchangers, water-cooled supersonic nozzles, premixed-gas com- stion equipment, and control systems for these facilities have been worked out d have been applied to existing facilities.

The present paper presents a general discussion of the important design prob- ms applicable to ceramic-heated air tunnels and includes flow conditions, heat ansfer, and construction details. The Langley 11-inch ceramic-heated tunnel, ich can be used either as a Mach 4 free jet with a 4-inch-diameter nozzle or as Mach 6 closed tunnel which provides a 10.5-inch-diameter flow, is discussed as typical facility which utilizes a ceramic pebble-bed heat exchanger.

INTRODUCTION

Aerodynamic heating from flight conditions at hypersonic speeds has presented w problems in aerodynamics, structures, and materials. In order to obtain eco- mical solutions to some of the problems, higher stagnation temperature ground st facilities are needed to study aerodynamic heating at hypersonic speeds, to dy imperfect gas effects at high temperatures, and to study the reaction of lative and heat-sink materials in high-temperature, high-velocity air. The NASA s therefore made a study of high-temperature testing facilities such as electric c heaters, electric induction heaters, shock tubes, combustion tunnels, rocket s, and high-temperature ceramic heat exchangers. Inasmuch as oxidation is a jor problem in materials research, facilities producing high-temperature air in trast to rocket-jet facilities were of particular interest. One significant se of this work has been the development of ceramic heat exchangers capable of ducing temperatures of approximately 4,500° R. This type of heat exchanger has n utilized at moderate temperatures in blast-furnace regenerators, packed beds, pebble-bed heat exchangers for heating gases; some of these facilities are scribed in references 1 through 4. A considerable amount of information is ilable on their operation.

Early work on adapting such a ceramic heat exchanger to aerodynamic testing was done at the University of Minnesota (ref. 5). Additional work was done at Brooklyn Polytechnic Institute with a facility having a pebble-bed heat exchanger constructed of alumina and capable of producing bed temperatures of 3,500° R (ref. 6).
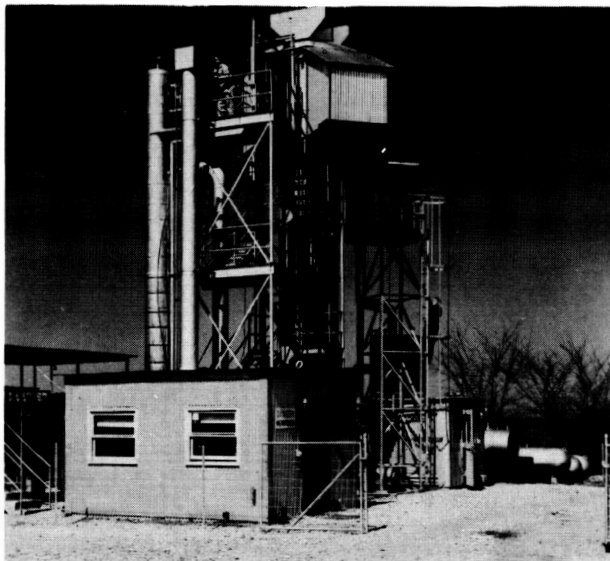
L-58-1494

Figure 1.- Langley 11-inch ceramic-heated tunnel.

At the time design was started on the facility discussed herein, many problems existed in extending the temperature capabilities of ceramic-heated air facilities. Some of the problems were associated with the containment of a 4,500° R pebble bed in a pressure vessel: the ability of the ceramics to withstand thermal shock, pressurization, and depressurization; the problem of economically heating the ceramics without contamination or damage; and the incorporation of the various components into a successfully operating facility.

These problems led to the construction at the Langley Research Center of a small ceramic heat exchanger which utilizes zirconia ceramics. This heat exchanger provided air for a Mach 2 aerodynamic testing facility at mass-flow rates up to 0.3 lb/sec as described in references 7 and 8. The successful operation of this facility led to the construction of a larger facility (fig. 1) which is capable of delivering airflow up to 15 lb/sec up to 1,200 lb/sq in. stagnation pressure, at heat-exchanger temperatures up to 4,500° R, providing flow for either a Mach 4 free jet (described briefly in ref. 9) or a Mach 6 enclosed jet system.

The facility, its operation, and its performance characteristics are described herein. Also included is a brief discussion of some of the approaches investigated in the design of the heat exchanger, the water-cooled nozzles, and the pebble-bed heating system.

SYMBOLS

A   area

D   diameter

f   friction factor

2

Subscripts:

adiabatic wall

bulk water conditions

effective

3

g	gas
L	liquid
s	sphere
t	thermal
w	wall
∞	free stream

DESCRIPTION AND OPERATION OF APPARATUS

General Description

A diagram for a ceramic-heated air jet facility is presented in figure 2. Such a unit consists of a pressure vessel lined with a refractory and containing in the center, a bed of randomly packed pebbles or spheres. For the heating cycle, a burner is provided which heats the pebble bed by forcing the products of combustion downward through the pebble bed until the desired temperature distribution is attained. For the testing cycle, the burner is closed off, and air is passed upward through the pebble bed and exhausted through a water-cooled nozzle at the top of the pressure vessel. A quartz window in the side of the pressure vessel permitted temperature readings to be taken at the top of the pebble bed.

As a specific example figure 1 shows the Langley ceramic heat exchanger with a test house on top for mounting the Mach 4 free-jet nozzle or the Mach 6 nozzle diffuser system. Used with the Mach 6 nozzle, this facility is known as the 11-inch ceramic-heated tunnel. The heat exchanger shown in the general diagram in figure 2 consists of a 54-inch-diameter steel tank 30 feet high lined with 12 inches of refractory and containing a 28-inch-diameter bed of 3/8-inch-diameter spheres, randomly packed 20 feet deep.

Figure 3 presents a diagram of the Mach 6 nozzle and the diffuser system which is used interchangeably with the Mach 4 free-jet nozzle.

Heat-Exchanger Design

Choice of materials.- In choosing ceramics for use in the heat exchanger, consideration must be given to the fact that air is used as the test medium, and that it is desirable to choose a ceramic which will produce the least reaction with air at the highest possible stagnation pressures and temperatures. A study was made of the properties of commercially available, high-temperature ceramics which might be used in the construction of the heat exchanger. Inasmuch as it desired to build a heat exchanger which would permit operation at temperatures to 4,560° R for heating air, the following properties were considered: mechanical strength as a function of temperature; reaction with air and other materials;
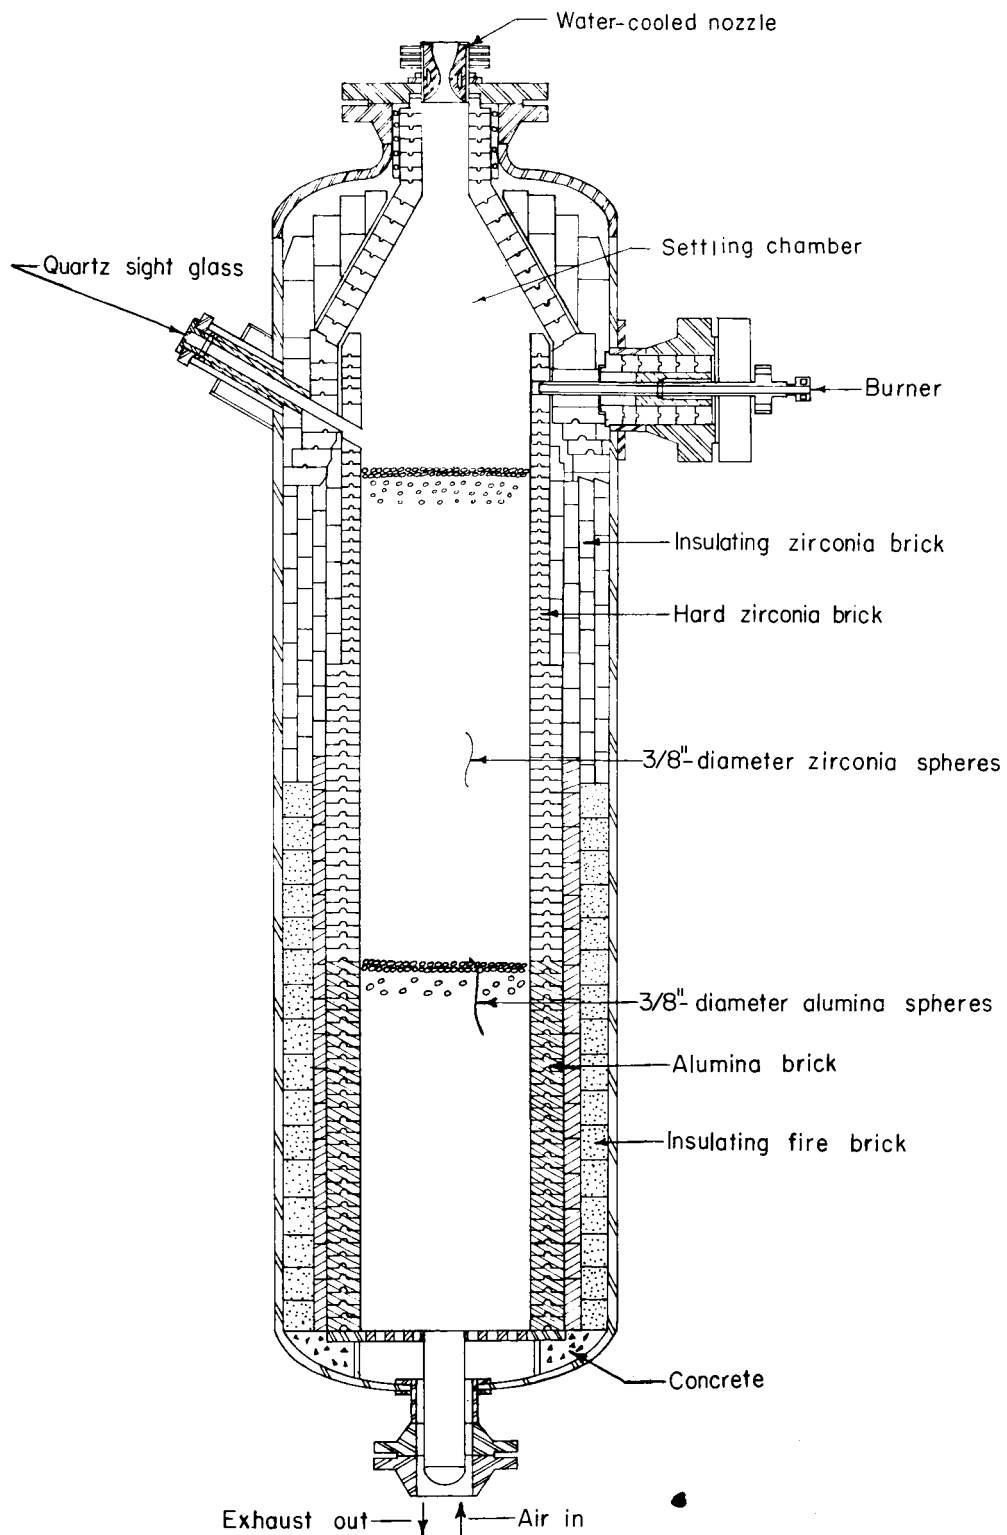
4

Figure 2.- Ceramic-heated tunnel and water-cooled nozzle.

Labels on figure:
- Water-cooled nozzle
- Settling chamber
- Quartz sight glass
- Burner
- Insulating zirconia brick
- Hard zirconia brick
- 3/8"-diameter zirconia spheres
- 3/8"-diameter alumina spheres
- Alumina brick
- Insulating fire brick
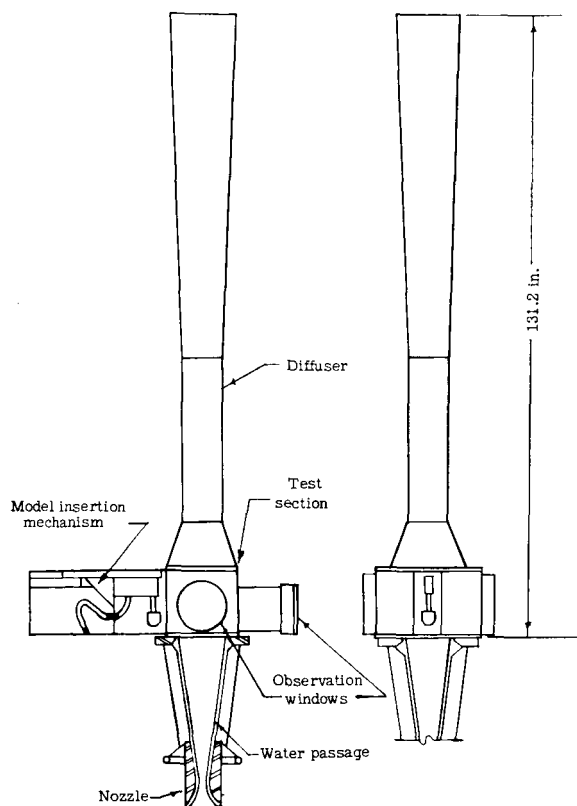- Concrete
- Exhaust out
- Air in

Figure 3.- Mach 6 nozzle and test section.

density, thermal conductivity; heat capac-
ity; abrasion resistance; and thermal sho
resistance upon heating and cooling; avai
ability; and health hazards. Only the
oxides were considered since other refrac
tories such as carbides, nitrides, sili-
cides, borides, sulphides, and the refrac
tory metals oxidize at high temperatures
air. A detailed discussion of the variou
oxides is available in references 10 and

Zirconia (ZrO_2) with a melting point
of $5,330^O$ R was used in the heat exchange
rather than thoria (ThO_2) or beryllia (Be
(because of their potential health hazard
and high cost), or magnesia (MgO) (becaus
of its lower density and higher vapor pre
sure), or alumina (Al_2O_3) (because of its
lower melting point). Zirconia appeared
be the most promising commercially avail-
able refractory for use in a heat exchang
which produced temperatures up to $4,500^O$
However, zirconia does have several disad
vantages: its surface is less resistant
abrasion than alumina; it may revert to
zirconium carbide at high temperatures in
a carbonaceous reducing atmosphere, and i
the pure state, it passes through a crys-
talline inversion between $2,000^O$ and
$2,900^O$ R.

The commercial zirconia originally used in the heat exchanger was the par-
tially stabilized product chosen for its high resistance to thermal shock. Suc-
cessful operation of the heat exchanger was obtained with the partially stabiliz
product; however, decomposition occurred in certain regions of the heater lining
with time. It was found that the partially stabilized zirconia in sections of
the unit which were heated above $2,000^O$ R, but not above $2,900^O$ R, lost strength
completely after repeated cycling. However, the same product retained its
strength when heated above $2,900^O$ R. A series of controlled experiments in a
laboratory kiln were made to define the nature of the problem. They showed that
the problem was associated with crystalline inversion.

Figure 4 presents a diagram of the linear expansion of zirconia as a functi
of temperature during heating and cooling, as presented in reference 12. Pure
zirconia has a monoclinic crystalline structure at lower temperatures and under-
goes a sudden change to tetragonal form with an accompanying decrease in volume
beginning at $2,300^O$ R; upon cooling it reverts to the monoclinic form with a sul
sequent increase in volume. The bond between the crystals breaks down and ther
reduces the strength of the ceramic body to nearly zero when nonstabilized zir-
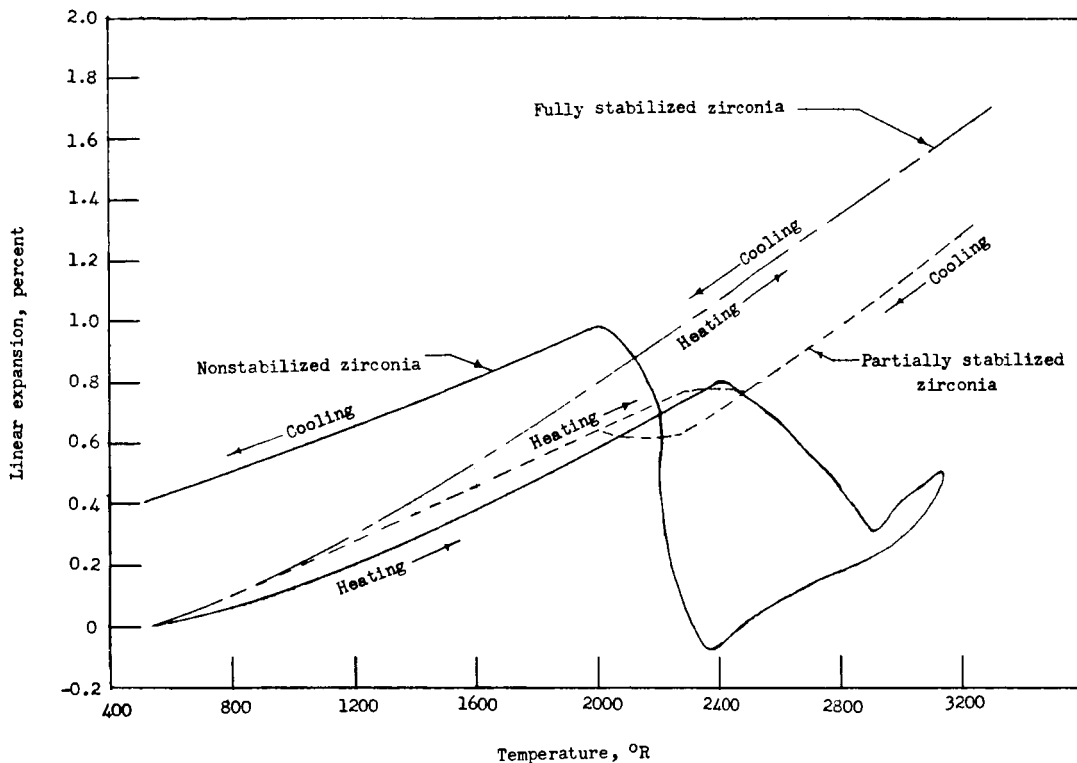conia is cycled through this inversion region.

Figure 4.- Linear expansion as a function of temperature for zirconia. From reference 12.

The partially stabilized zirconia, produced by adding 5 percent to 6 percent
[ca]lcium oxide (CaO) to give a predominantly cubic structure, undergoes only a
[sm]all volumetric change in cycling through the inversion region. However, tests
[sh]ow that the material breaks down after being repeatedly cycled (approximately
[10] times) from 1,900° R to 2,500° R. Tests were also run on fully stabilized
[zi]rconia; it did not break down under the same conditions. Fully stabilized zir-
[co]nia, made by adding 10 percent to 12 percent calcium oxide, having a fully cubic
[cr]ystalline structure retains its crystal form on heating and cooling and was
[fo]und to retain its strength. It is also known that this product is less resis-
[ta]nt to thermal shock than the partially stabilized product. Fully stabilized
[(c]ubic) zirconia is now used in portions of the heat-exchanger wall which are not
[he]ated above 2,900° R where it appears to cycle satisfactorily even though it is
[le]ss resistant to thermal shock.

The load-bearing capability of zirconia decreases rapidly with temperature;
[at] 3,960° R, its compressive strength is about 45 lb/sq in. (ref. 12). In the
[ab]sence of available data, measurements were made at Langley Research Center of
[th]e strength of zirconia at 4,460° R. At this temperature, zirconia has a
[st]rength of 7 lb/sq in.

In order to prevent loading the ceramics beyond their capabilities at any
[pl]ace in the pebble bed, the pebble bed was designed for a decreasing temperature
[th]rough the bed, with 4,560° R as the maximum temperature at the top of the bed
[an]d 1,460° R as the maximum temperature at the bottom of the bed.

7

Although commercial zirconia is fairly resistant to thermal shock, care mus be exercised to prevent rapid heating and cooling of the ceramics. Large cerami shapes, sharp overhanging corners, and areas of shear were avoided in the desigr The heat exchanger was designed to prevent passage of air through the brickwork (thus bypassing the pebble bed) by staggering the joints, avoiding open spaces, and by inserting cement barriers between the layers of brick.

Other ceramics can be used in the lower temperature sections of the heat exchanger; however, care should be exercised in their choice since solid-state reactions can take place between unlike ceramics which completely alter their properties at high temperatures. Alumina ceramics were used in zones of the hea exchanger and the outer brick lining where the temperature does not exceed $2,460^{\circ}$ R. Reference 10 presents a phase diagram for the alumina-zirconia reaction. Alumina is highly resistant to abrasion; therefore, very little of it wil sift or be blown into other sections of the heat exchanger.

Heat transfer through ceramics.- The main heat-transfer considerations in t design of the heat exchanger were the heat transfer through the ceramic lining from the combustion gases to the pebbles, and from the pebbles to the air durin the heating and blowdown cycles.

In order to determine the lining thickness required to keep the steel pressure-vessel shell below $1,060^{\circ}$ R under peak temperature conditions, steady-state conditions were assumed, and shell temperature was computed by the method of total resistance. Steady-state heat conduction through walls of unlike soli may be calculated by dividing the total temperature drop by the total resistance which is the sum of the individual resistances. The heat transfer then is

$$q = \frac{\Delta T}{\dfrac{1}{h_1} + \dfrac{1}{h_2} + \dfrac{1}{h_3} + \dfrac{1}{h_4} + \dfrac{1}{h_5}}$$

where subscripts 1, 2, and 3 are the successive layers of ceramics, 4 is the pressure-vessel shell, h_5 is the convective heat-transfer coefficient of the outside wall to the air, and ΔT is the temperature difference between the ins wall and the outside cooling air.

Design of the ceramic walls was based on conditions at the top of the bed where maximum heat transfer occurs. The same thickness of insulation was used the remainder of the pressure vessel to prevent excessive heat loss. Basing th design of the heat exchanger on steady-state conditions for maximum operating temperature gave conservative, satisfactory engineering results. In actual pra tice the maximum bed temperature of $4,560^{\circ}$ R is seldom maintained for more than 2 hours. Measurements show that under this condition, the shell temperature do not exceed 970° R.

Heat transfer through the packed bed of spherical particles for conditions of stagnant interstitial gas, that is, no flow through the heat exchanger, was calculated by conventional methods (ref. 13), to determine the order of heat fluxes during idling conditions.

8

The capabilities of the pebble bed as a heat exchanger with flowing gases ere investigated by a computational procedure which considered the heat conduction through the insulating side walls and utilized theoretical and experimental eat-transfer information on pebble-bed heaters from references 13 and 14.

Pressure drop through pebble bed.- Pressure drop across the packed bed is an mportant factor in the design of a pebble-bed heat exchanger. When the pressure rop multiplied by the cross-sectional area becomes equal to the weight of the ed, a partial fluidization begins to take place.

Several methods which have been used to calculate differential pressure drop rough packed beds are presented in references 1, 14, and 15. The methods in eference 15 give satisfactory engineering answers over a wide range of conditions en used with previously determined experimental friction factors. Since a temerature differential is maintained through the bed, differential pressure over crements of the bed is calculated by

$$-\Delta p = \frac{f(F_f) l V^2 p}{2 g D_s}$$

ere

$_s$ diameter of spheres

          effective velocity based on empty cross-sectional area

          density of gas

          length of pebble bed

Δp pressure drop due to friction

In the absence of available data on zirconia spheres, values of frictionactor factor F_f and friction factor f for alumina spheres of comparable size, abulated in reference 1, were used in the computations to determine pressure drop rough any section of the bed.

Figure 5 presents measured pressure drop compared with theory across the ebble bed of the 11-inch ceramic-heated tunnel during a typical run. Stagnation essure is also plotted. The pressure drop during the pressurization period st be closely controlled, since it may be several times the value of steadyate operation. In actual operation, the allowable pressure drop is limited to) percent of that required to lift the bed.

Method of heating the bed.- Because of the size of the bed and the temperaires involved, a combustion heater was the most practical for heating the bed. ie combustion system must heat the bed under controlled temperatures and heating ites in order to obtain the desired temperature distribution, must not contamiite the ceramics, must be controllable over the entire operating range, and must
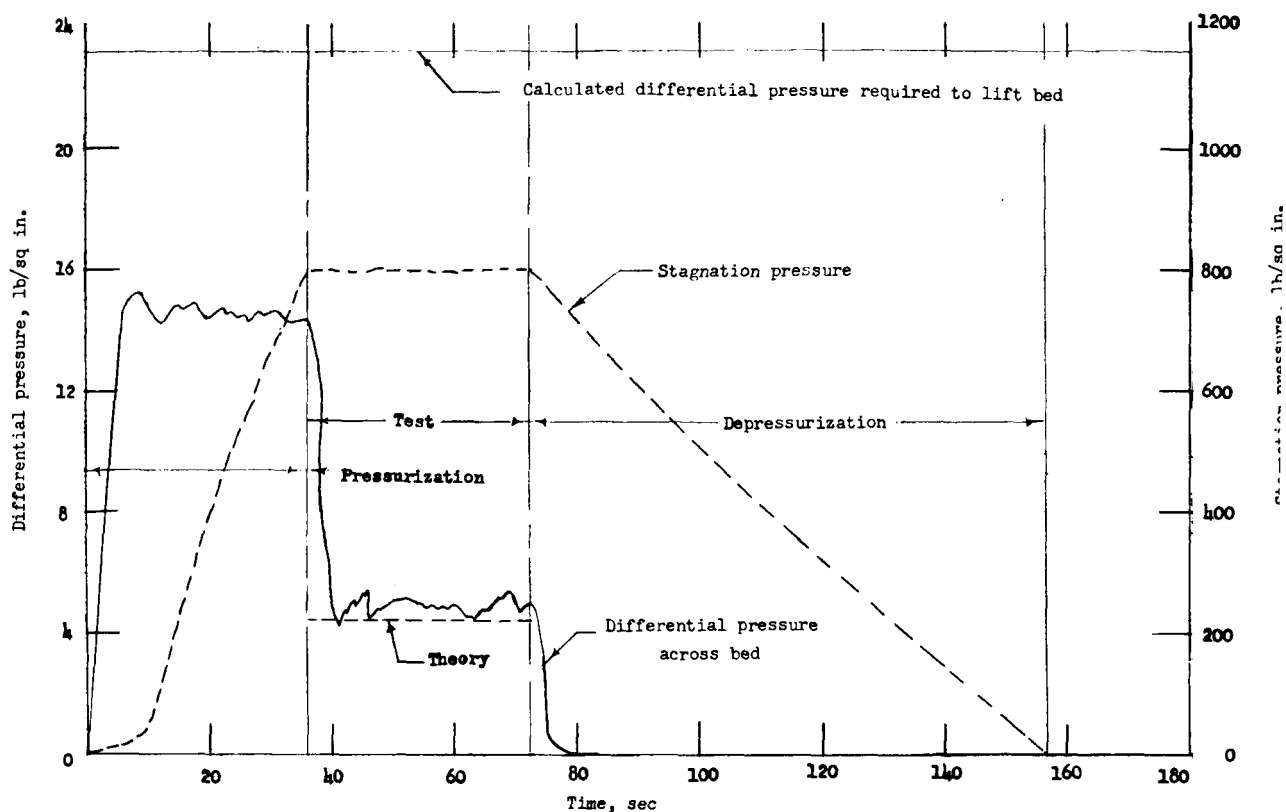
9

Figure 5.- Differential pressure and stagnation pressure as a function of time for a typical test run for the 11-inch ceramic-heated tunnel.

produce complete combustion in a very small space. After a study of the require-ments and experimental work with burner types which use both gas and oil (see ref. 1), a gas-fired premixed burner was chosen for use in this system. Propane was chosen as the fuel because it was readily available and easy to meter and control. Oxygen enrichment of the combustion air was necessary to heat the ceramics to 4,560° R inasmuch as the propane-air combustion temperature is several hundred degrees less than 4,560° R.

Figure 6 presents a diagram of the fuel-air mixing device, or burner, used with the ceramic-heated facility. Propane, air, and oxygen are mixed together the center tube of the burner and are injected into the settling chamber (fig. above the pebble bed where combustion takes place. Velocity of the gas mixture in the inner tube of the burner is sufficient to prevent flashback at all firin rates and fuel-air-oxygen mixtures used in the operation. Flame velocity, com-bustion temperatures, and gaseous diffusion rates of propane-air-oxygen mixture can be calculated by methods presented in reference 16.

Circulation of water through the outer jacket of the burner prevents over-heating of the metal parts where they extend through the heated ceramic wall (fig. 2). Premixing of propane-air and oxygen in the inner tube of the burner produces a clean, carbon-free, continuous, low-luminosity flame at all operatin conditions.
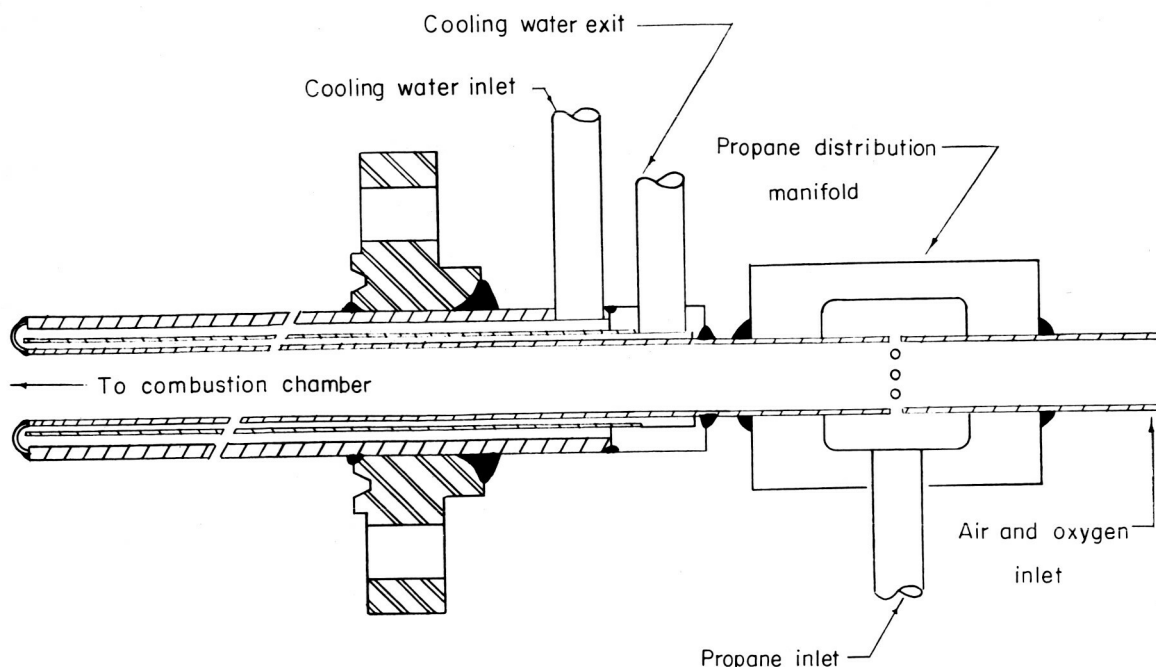
10

Figure 6.- Diagram of burner for heating pebble bed.

Figure 7 is a photograph of the burner for the ceramic-heated tunnel described herein. The burner is designed to operate at heating rates of 400,000 to 2,000,000 Btu/hr. For bed temperatures up to 3,600° R only propane and air are used; for higher temperatures, commercial oxygen is used to obtain higher flame temperatures. At 4,500° R 60 percent of the required oxygen is supplied by commercial oxygen, and 40 percent is supplied by air. Higher oxygen-air ratios are not used since 4,500° R is considered the maximum safe operating temperature for this facility. In order to maintain an oxidizing atmosphere which is necessary for complete combustion of the fuel, oxygen, 10 percent in excess of that required for a stoichiometric mixture, is used.

When the ceramics are cold, ignition is accomplished with a gas-fired igniter. Above 1,900° R, bed-temperature ignition is spontaneous when the fuel-air flow is begun.

Figure 8 presents a diagram of the burner control system. Fuel-air and oxygen rates are regulated by means of manually operated valves while the rates
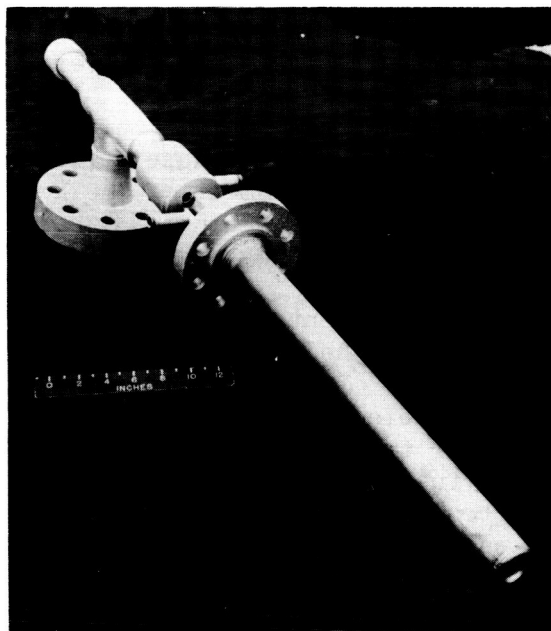
L-60-1218

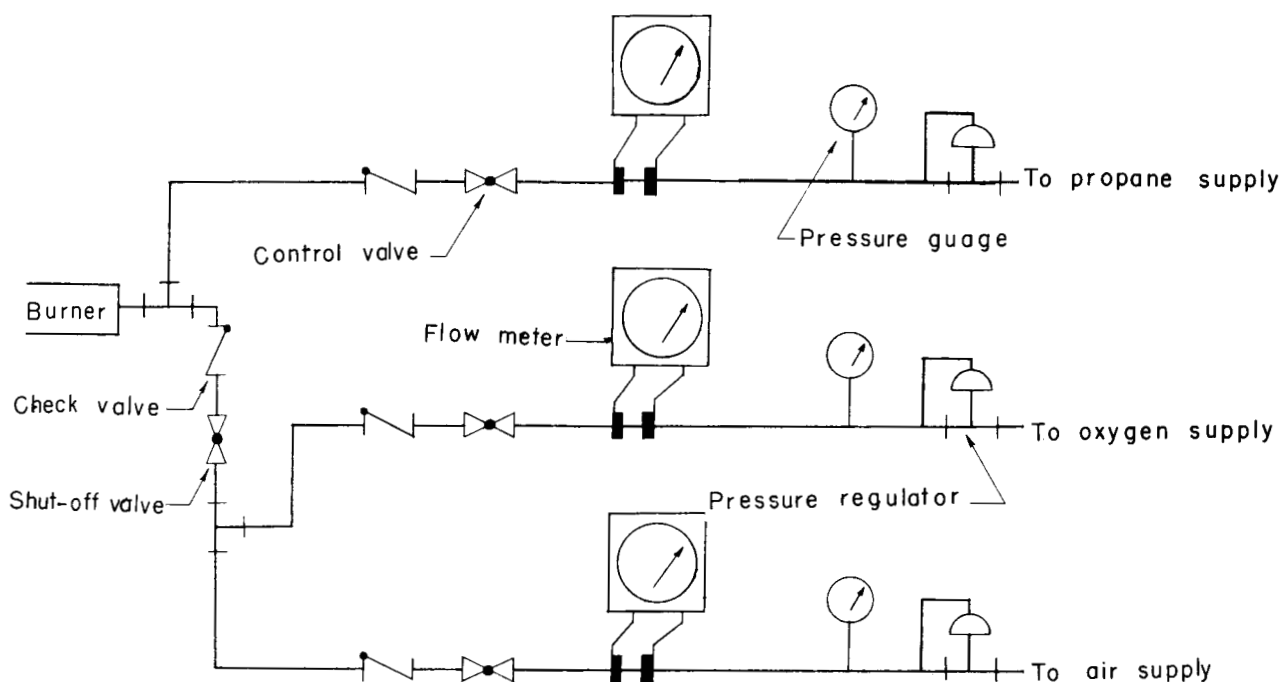Figure 7.- Photograph of burner for heating pebble bed.

11

Figure 8.- Diagram of burner control system for ceramic heat **exchanger**.

of each are measured by manometers connected to low-pressure-drop, sharp-edged-orifice meters. Fuel and oxidizer rates are accurately controlled during the heating cycle.

The premixed gas-fired combustion system has proved highly satisfactory for heating the heat exchanger throughout its range of operation.

Nozzle Design

Mach 4 nozzle.- Figure 9 presents a diagram of the Mach 4 water-cooled nozz with a tabulation of the ordinates downstream of the throat, and figure 10 presents a photograph of the nozzle. The nozzle has an exit diameter of 4 inches and exhausts to the atmosphere. Ordinates for the nozzle, designed for a minimum length, were determined by methods presented in reference 17.

Figure 9.- Diagram of water-cooled Mach 4 nozzle. Dimensions are in inches.
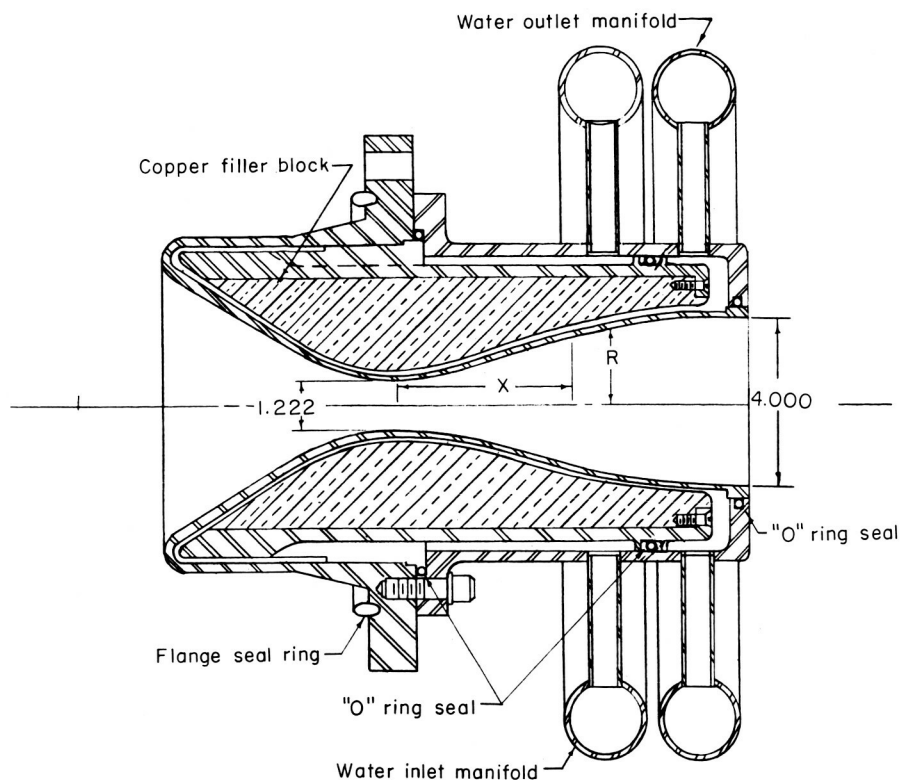
Nozzle ordinates downstream of throat.

X	R
0.000	0.611
0.250	0.704
0.500	0.786
0.750	0.871
1.000	0.941
1.250	1.013
1.500	1.082
1.750	1.150
2.000	1.213
2.250	1.274
2.500	1.333
3.000	1.441
3.500	1.537
4.000	1.620
4.500	1.691
5.000	1.756
5.500	1.812
6.000	1.860
6.500	1.901
7.000	1.933
7.500	1.961
8.000	1.984
8.500	2.000
8.5376	2.001

The inner wall and throat section of the nozzle are constructed of T-1 high-strength alloy steel. The wall thickness at the throat is 0.062 inch. A solid copper filler block (fig. 9) directs the cooling water along the inner wall of the nozzle and also acts as a heat sink in case of failure of the nozzle wall which would prevent rapid opening of the nozzle throat.
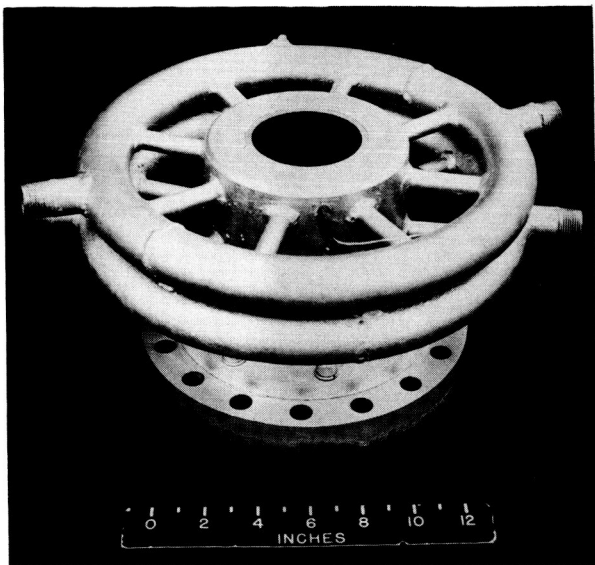
L-60-1222

Figure 10.- Photograph of Mach 4 water-cooled nozzle.

Figure 11 presents a diagram of the water-cooling system for the nozzles. During the blowdown cycle, water from the supply tank is forced through the water-cooling system at 300 lb/sq in. by applying air pressure to the top of the supply tank. Approximately 80 gal/min are forced through the cooling passage of the nozzle. At all other times, water is pumped through the nozzle at 60 lb/sq in. and through the closed circulating system. The water is treated with a mixture of sodium bichromate and sodium polyphosphate to retard rust and
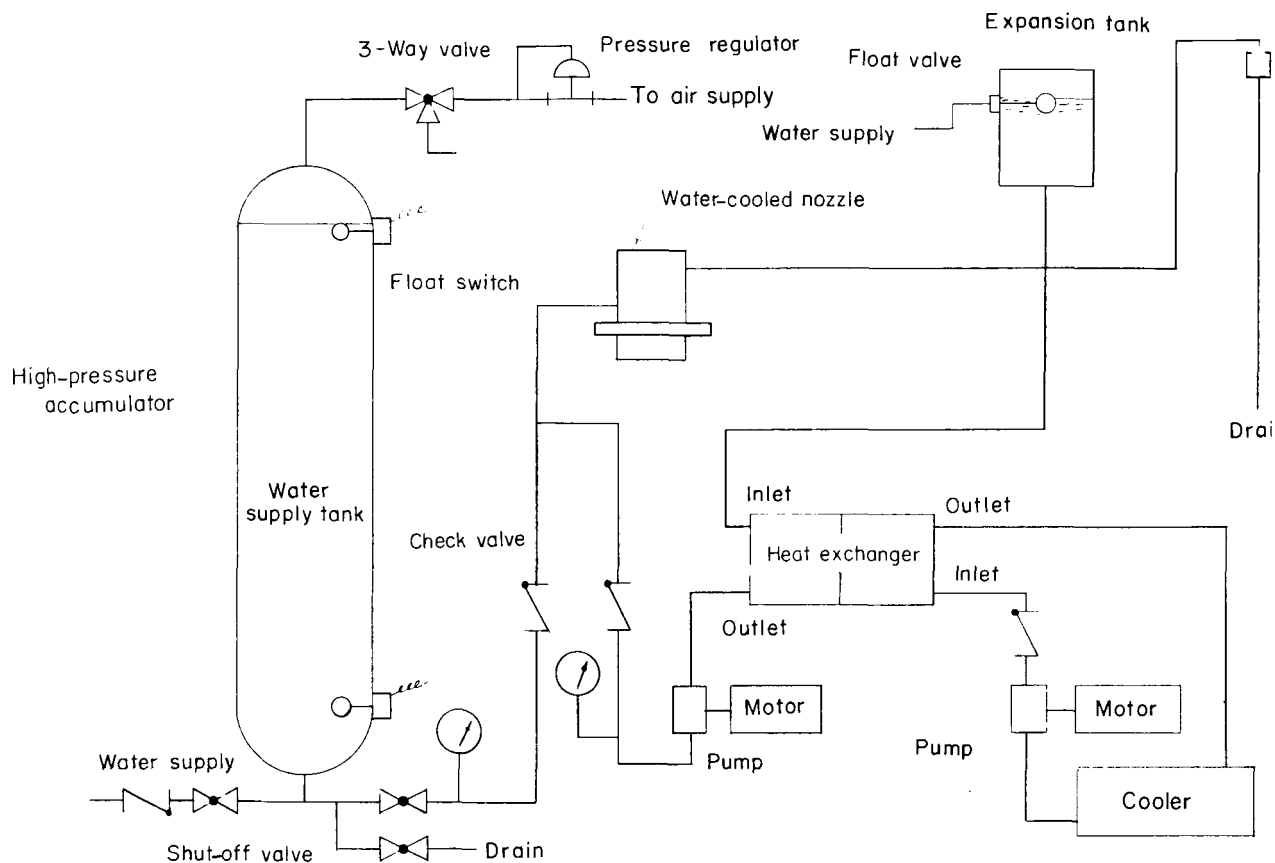
13

Figure 11.- Diagram of nozzle water-cooling system for 11-inch ceramic-heated tunnel.

scale formation. During the firing cycle, the closed water system is maintained at 120° F by the heat exchanger to prevent condensation of combustion products on the inside of the nozzle.

This type of nozzle has been successfully used for several hundred tests and has proved adequate up to stagnation conditions of approximately 4,050° R and 1,200 lb/sq in. Long-term rust and corrosion are still a problem; however, construction of the nozzles from stainless steel does not appear to be practical because of its lower thermal conductivity.

<u>Mach 6 nozzle</u>.- Figure 12 presents a diagram, and figure 13, a photograph of the Mach 6 nozzle. Construction of this nozzle is identical to the Mach 4 nozzle

Figure 12.- Diagram of Mach 6 nozzle. Dimensions are in inches.

upstream of the throat. The Mach 6 nozzle mounts on the facility in place of the Mach 4 nozzle and uses the same water-cooling system at the same flow rates. Downstream of the throat, the airflow expands conically at a total angle of 15° and exits from the nozzle into the test section at the 10.6-inch-diameter location. The flow continues into the diffuser, where pressure is recovered, and then exhausts to the atmosphere. Performance and operational parameters for the Mach 6 nozzle and diffuser system are presented in the section entitled "Performance of Facilities." Heat-transfer considerations upstream of the throat of the Mach 6 nozzle are identical to the Mach 4 nozzle.

<u>Nozzle heat transfer</u>.- The requirements for the design of the nozzle are that it produce a uniform supersonic flow with a minimum heat loss, withstand the pressure and thermal stresses imposed on it, and be resistant to oxidation and erosion in order to maintain its contour. Two methods appeared practical for cooling the nozzle, that is, film cooling and conduction cooling with a liquid-cooled wall. The second

L-61-5760
Figure 13.- Photograph of Mach 6 nozzle.

15

method was considered the more desirable approach inasmuch as additional mass would not be added to the flow.

The principal stresses in the nozzle are due to the thermal gradients throu the wall and the hoop stress due to pressure forces. The thermal stresses in th throat can be approximated by the equation for a thin-wall cylinder (ref. 18).

$$\sigma_t = \frac{\eta \epsilon \, \Delta T}{2(1 - \mu)}$$

where

ΔT temperature difference between inside and outside surface of wall

η coefficient of thermal expansion

ϵ modulus of elasticity

μ Poisson's ratio

Thermal stress is proportional to the temperature gradient ΔT through the wall and, therefore, to the heat flux through the wall. Neglecting longitudinal conduction along the nozzle wall, the heat flux is the same from the gas to the wal through the wall, and from the wall to the water as expressed by the equation

$$q = h_g\left(T_{aw} - T_{w,hot}\right) = \frac{k}{t}\left(T_{w,hot} - T_{w,cold}\right) = h_L\left(T_{w,cold} - T_{water}\right)$$

Analytical design of a nozzle therefore requires determination of h_g in order to determine the temperature through the wall on which the thermal stress depends.

Previous experience with liquid-cooled conductive wall nozzles was confine almost entirely to rocket nozzles. A study was therefore made of the temperatu gradients, film coefficients, and thermal and pressure stresses involved in designing a nozzle for $4,000°$ R air at high pressure. Concurrently a water-coo nozzle was built and used successfully on the facility described in reference 1

During design work on the present facility, theoretical predictions gave a wide variation of results for nozzle-throat heat transfer. Because of the uncertainty as to what the actual throat heat transfer would be, a nozzle simil in design to that used in reference 1 was built and tested with the present fac ity at successively higher temperatures and pressures, with careful examination for indications of excessive thermal stress after each run. No indication of thermal-stress failure was evident when the nozzle was operated at a stagnation pressure of 815 lb/sq in. absolute and a stagnation temperature of $4,000°$ R.

Because more information was desired concerning nozzle heat transfer, it w decided to measure heat transfer in an experimental nozzle over the proposed ra

of operating conditions. In order to measure heat transfer, inlet and exit water temperatures were measured with thermocouples, and a thermocouple was spotwelded on the back wall of the throat of the nozzle and another, 2 inches downstream of the throat. Five tests were made with nominal conditions of stagnation pressures of 815 to 1,200 lb/sq in. and stagnation temperatures of 2,510° R to 4,110° R, the results of which are presented in table I.

TABLE I.- MACH 4 NOZZLE HEAT-TRANSFER TEST INFORMATION

Run	Stagnation pressure, lb/sq in.	Stagnation temp., °R	Cooling water inlet temp., °R	Cooling water temp. rise, °R	Cooling water flow rate, gal/min	Cold wall at throat, °R	Cold wall 2 in. downstream of throat, °R
1	815	2,520	524	9.9	83.6	620	584
2	1,200	2,510	526	11.6	83.6	634	608
3	1,200	3,210	535	15.7	83.6	670	637
4	1,200	4,010	537	22.6	83.6	739	680
5	815	3,260	530	14.7	83.6	639	614

The rate of heat transfer through the wall was determined from the experimental data by use of the equation

$$q = h_L \left(T_{w,cold} - T_{water} \right)$$

The water heat-transfer coefficient h_L was determined by the methods of reference 13 for turbulent flow in concentric annular passages by the equation

$$h_l = \frac{0.023 R^{0.8} N_{Pr,b}^{1/3}}{D_e} \left(\frac{v_b}{v_w} \right)^{0.14} k_b$$

where $D_e = \frac{4A}{P}$, effective diameter of cooling passage

A   cross-sectional area, ft^2

P   wetted perimeter

k   thermal conductivity of liquid

R   dimensionless Reynolds number

N_{Pr} coolant Prandtl number

k   thermal conductivity of the liquid

Subscripts:

b   bulk water conditions

l liquid

g   gas

w   wall conditions

The nozzle throat heat-transfer coefficient was then determined from

$$h_g = \frac{q}{T_{aw} - T_{w,hot}}$$

$$= \frac{q}{T_{aw} - T_{w,cold} + \frac{q}{k/t}}$$

where subscript aw is adiabatic wall. A turbulent recovery factor of $N_{Pr}^{1/3} = 0.88$ was used in computing T_{aw}. Conductivity of the T-1 steel of 240 Btu-in./sq ft-hr-^{o}F for the nozzle wall of 0.062-inch thickness was used i the calculations. The accuracy in determining the heat transfer is dependent the accuracy of the assumptions used in calculating water heat-transfer coeffi cient and the assumption of T_{aw}.

Figure 14 presents the values of gas boundary-layer heat transfer derived from the above tests compared with theoretical flat-plate values for laminar a turbulent flow at nozzle-throat conditions calculated by methods of Van Driest (refs. 19 and 20). As shown by this comparison, the heat transfer measured at the throat of the nozzle was less than that calculated for turbulent flow but considerably above the values for laminar flow.

The nozzle for the facility described herein has been used several hundre times at pressures up to a maximum of 1,200 lb/sq in. absolute and up to 4,000 without signs of thermal-stress failure. Operation has been limited to these conditions inasmuch as calculations from the preceding data indicate that hot metal wall temperatures approach a limiting condition of 1,700^{o} R which was ch on the basis of thermal stress and oxidation considerations.
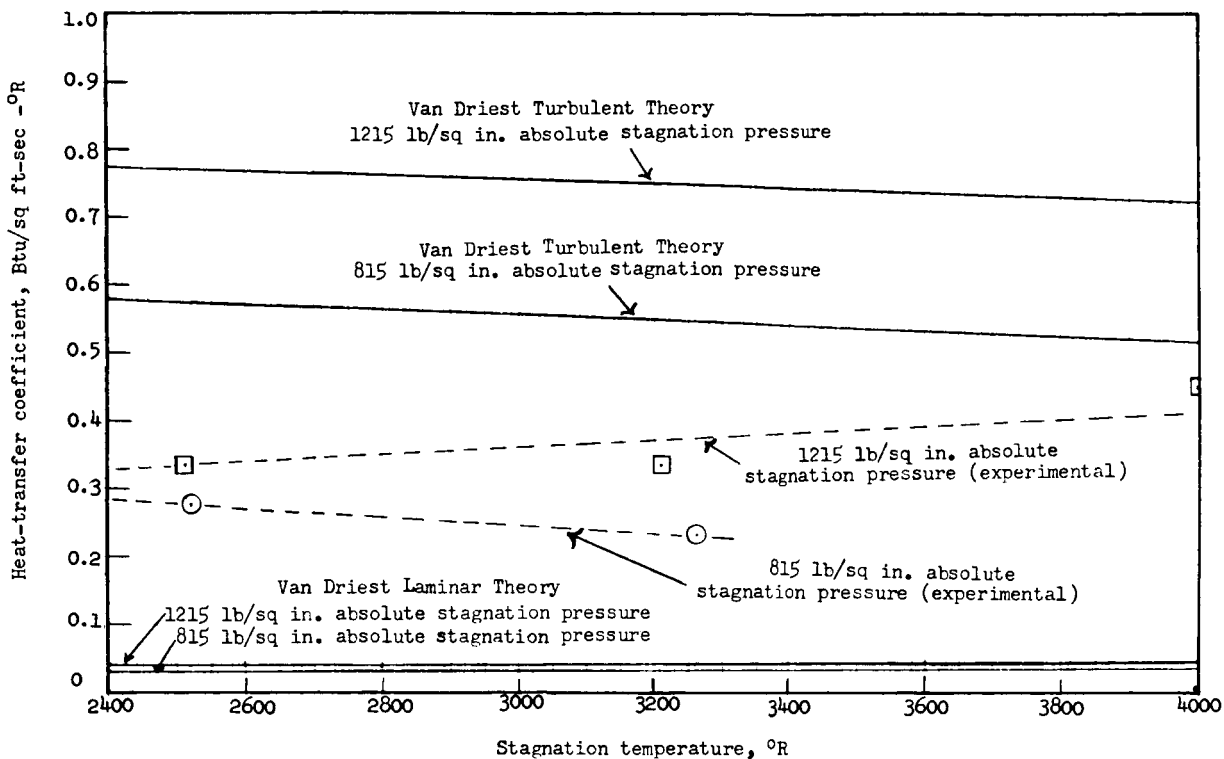
Figure 14.- Gas boundary-layer heat-transfer coefficient at throat as a function of stagnation temperature.

Table II presents a tabulation of the average temperature drop of heated air in passing through the Mach 4 nozzle, calculated from information listed in Table I. It is indicated that not more than 4 percent of the total enthalpy of the airstream is absorbed by the water-cooled nozzle. The decrement of enthalpy in the flow resulting from this removal of heat is primarily in the boundary layer.

TABLE II.- TEMPERATURE DROP OF AIR PASSING THROUGH MACH 4 NOZZLE

Run	Heat absorbed by nozzle, Btu/sec	Airflow rate, lb/sec	Computed stagnation temp. drop of air, °R
1	115.5	10.56	40.7
2	135.0	14.83	34.5
3	182.9	13.52	49.3
4	263.0	11.55	78.5
5	171.1	8.72	71.5

Operation of Apparatus

Heating and test cycle.- The operation of the ceramic-heated jet or tunnel system consists of two cycles: first, the heating cycle and second, the blowdo cycle.

During the heating cycle, products of combustion from the propane-air-oxyg burner (fig. 2) are forced by pressure of about 1 lb/sq in. from the settling chamber downward through the pebble bed until the desired temperature distribut is reached. Some of the products of combustion are also allowed to escape thro the nozzle in order to heat the ceramics leading to it.

Temperature distribution through the pebble bed is controlled by combustic rate and heating rate. For a typical heating cycle, temperature at the top of the bed may be 4,500° R with decreasing temperatures through the bed to a maxin temperature of 1,500° R at the bottom. Maintaining a temperature gradient thro the bed serves the purpose of imposing the least load on the ceramics exposed t the highest temperatures, allows the bottom retaining structure to be construct of conventional metals, and reduces the thermal shock on the bottom ceramics during the blowdown cycle. Temperature at the top of the bed is measured by me of an optical or recording pyrometer sighting through the quartz window (fig. 2 Temperature at the bottom of the bed is measured by thermocouples.

The heat exchanger is kept hot at all times when not in use, with a heatir rate of 500,000 Btu/hr which maintains the top of the bed at about 3,000° R ex(when it is necessary to cool it down for repairs. Heating the bed from a cold start requires approximately 24 hours, while reheating after a blowdown cycle requires from 1 to 3 hours.

After the pebble bed and surrounding brickwork are heated to the desired perature distribution for a test run, the burner is closed off and the heat exchanger is ready for the blowdown cycle.

For the blowdown cycle, air is passed upward through the pebble bed and exhausted through the nozzle. The airflow rate into the bed is controlled dur the pressurization cycle at a rate which does not allow the pressure different through the bed to exceed 75 percent of the differential required to lift the Pressure is increased until the desired stagnation pressure is reached after w the airflow rate is controlled to maintain a constant stagnation pressure. Pr surization to 800 lb/sq in. requires approximately 45 seconds. Running time i generally limited to 60 seconds but can be extended to 120 seconds with a grea total temperature drop. After the test, approximately 90 seconds are required for the pressure vessel to bleed down through the water-cooled nozzle.

Model insertions devices and model sizes.- Whenever the facility is used a Mach 4 free jet, either the single model support system (fig. 15) or the indexing model support system (fig. 16) is used to insert the model into the j at the control of the operator, when the desired stagnation pressure is reache The indexing model support system is used to test up to four consecutive model during a single blowdown cycle, and has proved valuable in testing a large num

20

materials specimens. Model movement in and out of the jet can be controlled
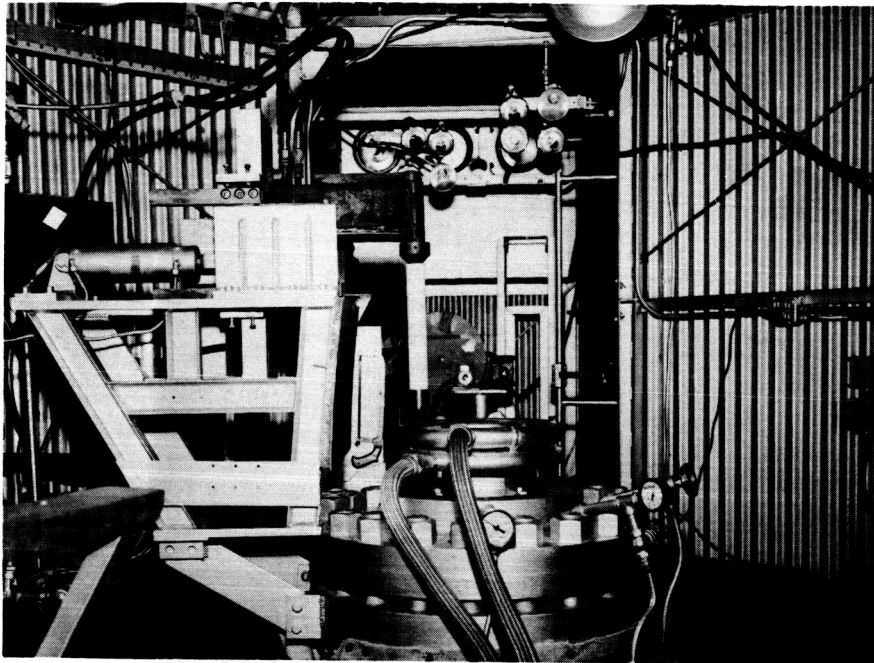~nually or by a preset programmer system.

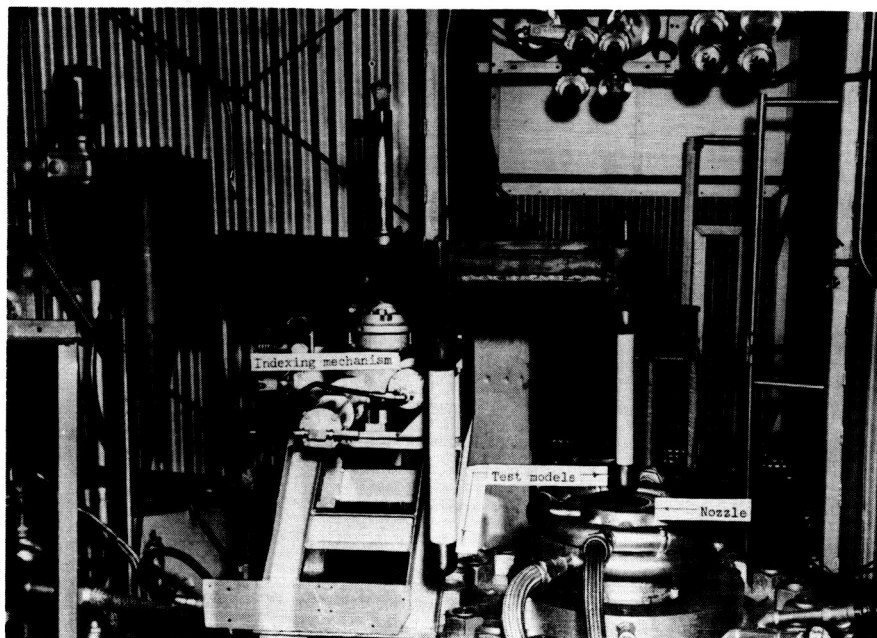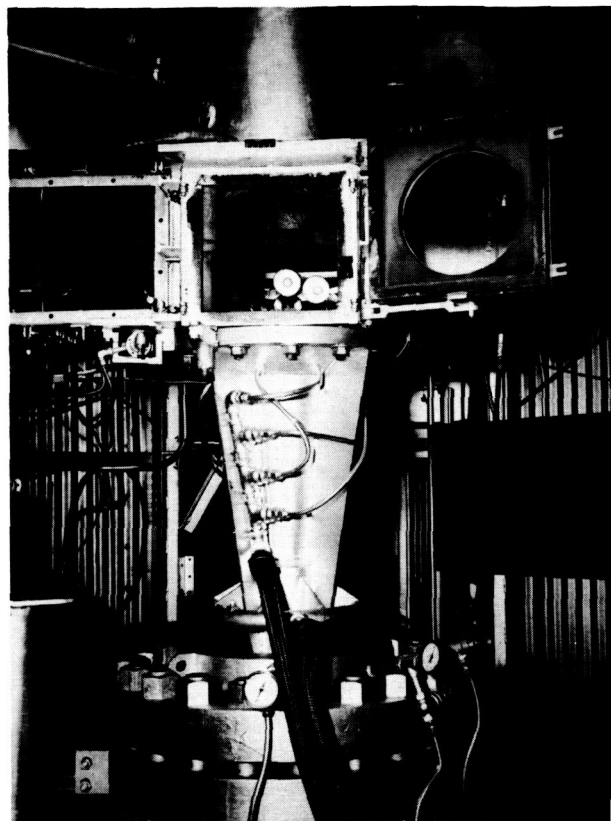Figure 15.- Photograph of Mach 4 test section.   L-61-7905

L-61-8383
Figure 16.- Photograph of indexing model-support system for Mach 4
ceramic-heated jet facility.

The model support system for the 11-inch Mach 6 tunnel system can be seen in figures 3 and 17. The model support system is attached to a carriage mounted on a track. The carriage is powered by a pneumatic cylinder to insert or remove the model from the jet. The box containing the carriage is enclosed and sealed during a test, since the test section operates at a free-stream pressure of less than 0.5 lb/sq in. after the tunnel is started. The model is protected from the heat of the jet, before and after the test, by a door between the test section and the box containing the model support system.

Instrumentation.- Tunnel stagnation pressure and pressure drop across the pebble bed are observed on visual gages and are recorded on chart recorders. The temperature of the top of the pebble bed is measured with an optical pyrometer before and after each test and is measured with a recording pyrometer during tests to determine the rate of change of temperature with time. These measurements indicate that the temperature of the top of the pebble bed drops about 5° F/sec during a blowdown cycle. Measurements with thermocouple probes at the exit of the water-cooled nozzle during a test indicate that for tests at about 2,500° R, the air stagnation temperature is about equal to the average of the "before-blowdown" and "after-blowdown" temperatures at the top of the bed and for temperatures near 4,000° R is from 100° to 200° F below average temperature at the top of the bed.

L-61-5400
Figure 17.- Photograph of Mach 6 nozzle and test section for the 11-inch ceramic-heated tunnel.

Tunnel-pressure data and model temperature and pressure data obtained from thermocouples and pressure transducers are recorded on two 18-channel recording oscillographs. The models may observed during a test by a remote television viewing system or, in the case of the Mach 4 nozzle, by a periscope. Motion-picture cameras are also used for obtaining visual data during a test. A shadowgraph system is used with both th Mach 4 and the Mach 6 test sections to obtain pictures of the tunnel flow.


Performance of Facilities

The two nozzle systems provided with the heat exchanger give a wide range enviromental capabilities. The facilities have been used in many types of high temperature research, materials testing, heat-transfer studies, and aerodynami

sting. The usefulness of this facility
r refined aerodynamic testing is at
esent limited by erosion of model sur-
ces which results from contamination of
e airstream by zirconia dust particles.

Mach 4 nozzle.- This nozzle provides
free jet 4 inches in diameter at the
it suitable for testing aerodynamic and
terials models at stagnation tempera-
res from 2,000° to 4,000° R, with stag-
tion pressures from 400 lb/sq in. to as
gh as 1,200 lb/sq in.; however, the
nimum pressure used is 800 lb/sq in.
cause of nozzle shock intersection. A
adowgraph of the flow from this nozzle
erating at a stagnation pressure of
5 lb/sq in. absolute is presented in
gure 18. The boundary shock from this
zzle, which is operated in an over-
panded condition because of pressure
mitation, produced a high local heating
te where the shock waves intersect any
rface; therefore, for tests requiring
iform flow conditions, model diameters
e generally limited to 2 inches to
ep within the shock boundaries.
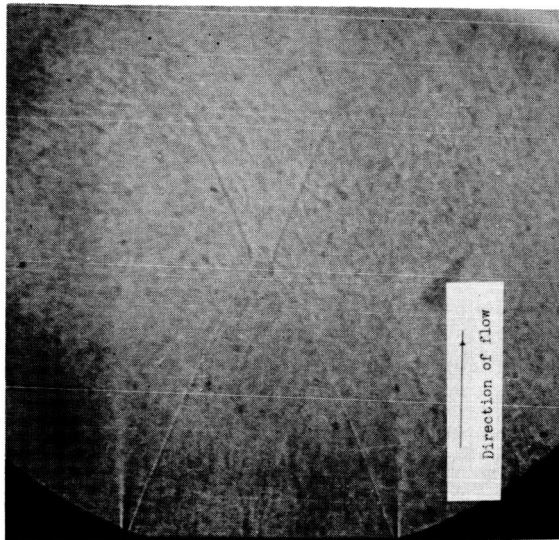
L-62-7031
Figure 18.- Shadowgraph of flow
from Mach 4 nozzle operated
at stagnation pressure of
815 lb/sq in. absolute and
stagnation temperature of
3,500° R.

Figure 19 presents a variation of calculated Mach number and velocity with
agnation temperature for the Mach 4 nozzle operating at 815 lb/sq in. absolute.

so shown as a function of stagna-
on temperature on the center line
e measured values of Mach number
rived from pitot pressure and
tal-temperature measurements made
2 inch beyond the nozzle exit.
lculated velocity varies from
400 ft/sec at 2,000° R to
610 ft/sec at 4,100° R, while
lculated values of Mach number
ry from 3.96 at 2,000° R to 3.74
4,100° R. Measured values of
ch number were from $1\frac{1}{2}$ to $3\frac{1}{2}$ per-
nt higher than calculated values.
lculations were made by methods
esented in reference 21 and were
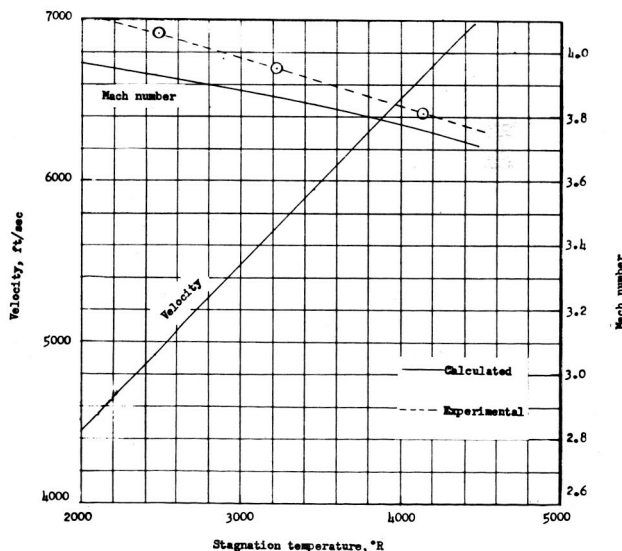ecked by methods presented in
ference 22.

Figure 19.- Variation of Mach number and velocity
with stagnation temperature for Mach 4 nozzle.

Figure 20 presents variation of calculated values of free-stream static pressure and temperature with stagnation temperature for the Mach 4 nozzle. Free stream pressure varies from 6.8 lb/sq in. absolute at 2,000° R to 6.95 lb/sq in. absolute at 4,100° R while free-stream temperature varies from 525° R at 2,000° to 1,360° R at 4,100° R.
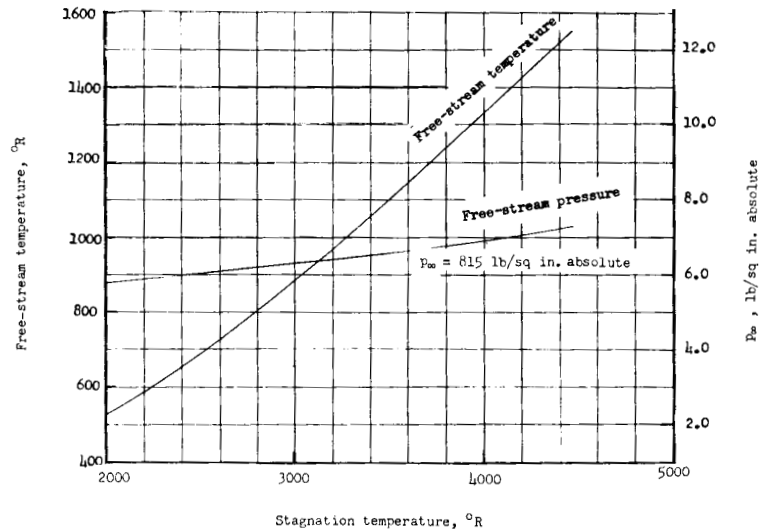
Figure 20.- Variation of free-stream pressure and temperature with stagnation temperature for Mach 4 nozzle.

Figure 21 presents the variation of calculated Reynolds number per foot with stagnation temperature. Reynolds number per foot varies from 7.76×10^6 at 2,500° R to 3.94×10^6 at 4,000° R.
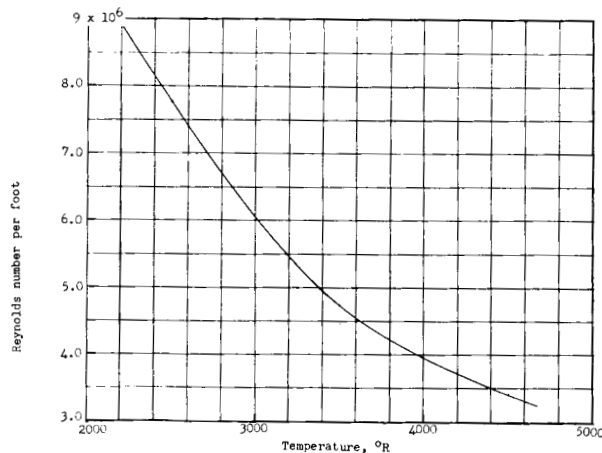
Figure 21.- Variation of free-stream Reynolds number with stagnation temperature for Mach 4 nozzle. $p_\infty = 815$ lb/sq in. absolute.

Figure 22 presents the variation of heating parameter $h\sqrt{D}$ for the stagna-
ion point of a hemisphere with stagnation temperature for the Mach 4 nozzle as
alculated by methods presented in reference 23.
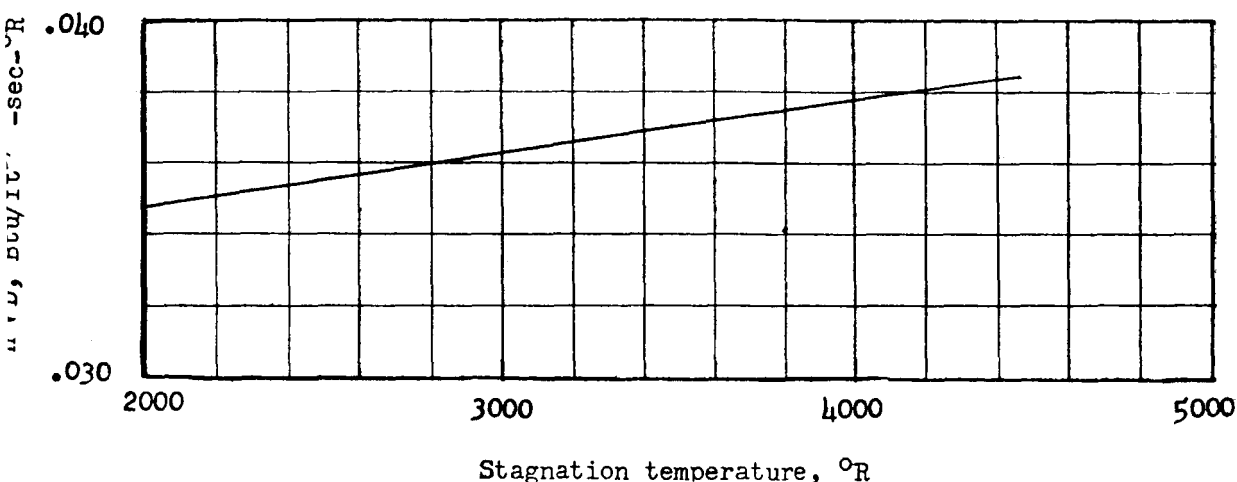
Figure 22.- Variation of heating rate for stagnation-point heating of hemispheric model with stag-
nation temperature for Mach 4 nozzle. p_∞ = 815 lb/sq in. absolute.

Mach 6 ceramic-heated nozzle.- The Mach 6 nozzle which has a 10.6-inch exit
.ameter is suitable for aerodynamic, heat-transfer, and materials testing. The
zzle-diffuser system is designed to operate at stagnation pressures from 815
, 1,215 lb/sq in. and stagnation temperatures from 2,000° R to 4,100° R. Axi-
.ble III presents the model sizes that have been tested in the facility.
mmetrical flat-face models up to $2\frac{1}{2}$ inches in diameter and hemispherical models
, to 4 inches in diameter can be tested at 1,200 lb/sq in. stagnation pressure
.thout blocking the tunnel flow.

TABLE III.- MODEL BLOCKAGE INFORMATION

| Model		Bleekage, percent	Stagnation pressure, lb/sq in. absolute	Results
	2-in. hemisphere cylinder	3.56	815 - 1,215	Ran satisfactorily
FLOW	3-in. hemisphere cylinder	8.64	815 - 1,215	Ran satisfactorily
	4-in. hemisphere cylinder	14.28	815 - 1,015	Blocked flow / Ran satisfactorily
	2-in. flat-face cylinder	3.56	815 - 1,215	Ran satisfactorily
FLOW	$2\frac{1}{2}$-in. flat-face cylinder	5.57	815 - 1,215	Ran satisfactorily
	3-in. flat-face cylinder	8.64	815 - 1,215	Blocked flow

Figure 23 presents shadowgraphs of 2-, 3-, and 4-inch hemispherical models and a 3-inch-diameter flat-face model with beveled edges in the Mach 6 flow. T[tunnel permits axisymmetrical models which do not choke the tunnel flow to be tested without boundary-shock intersection. Irregularly shaped configurations with cross-sectional areas up to 14 percent of the nozzle-exit area have been tested without choking the tunnel flow.
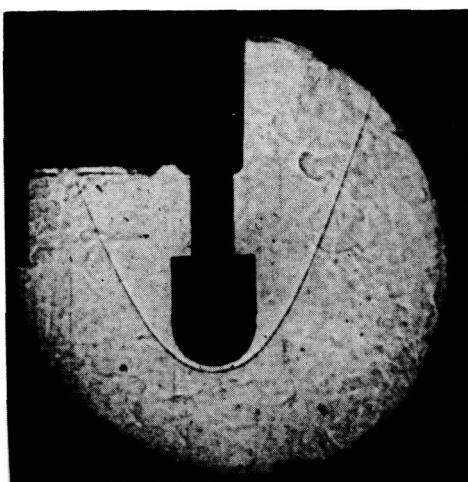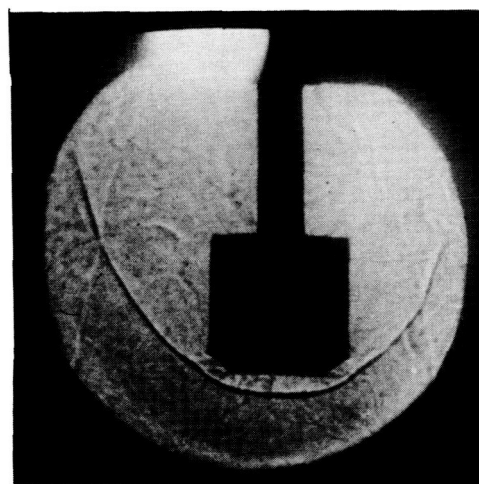

2-inch hemisphere
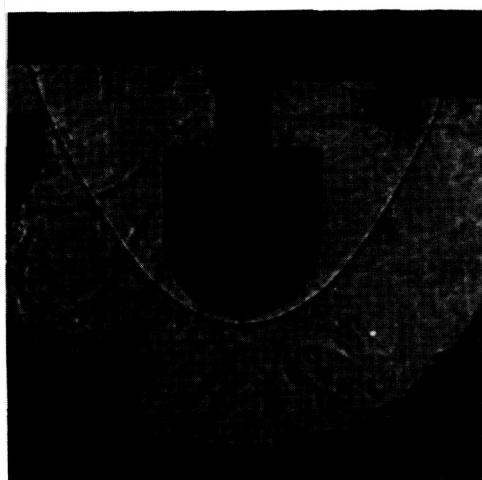
3-inch hemisphere
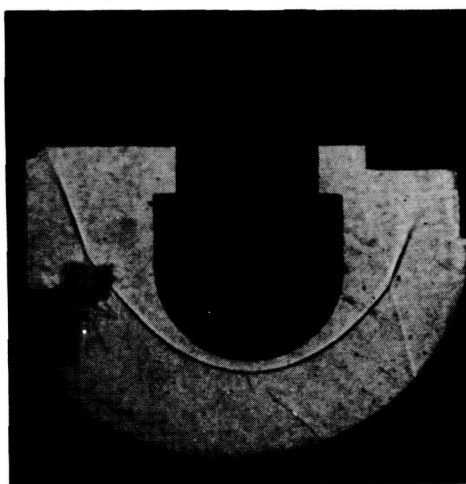
4-inch hemisphere

3-inch beveled cylinder

L-62-7032
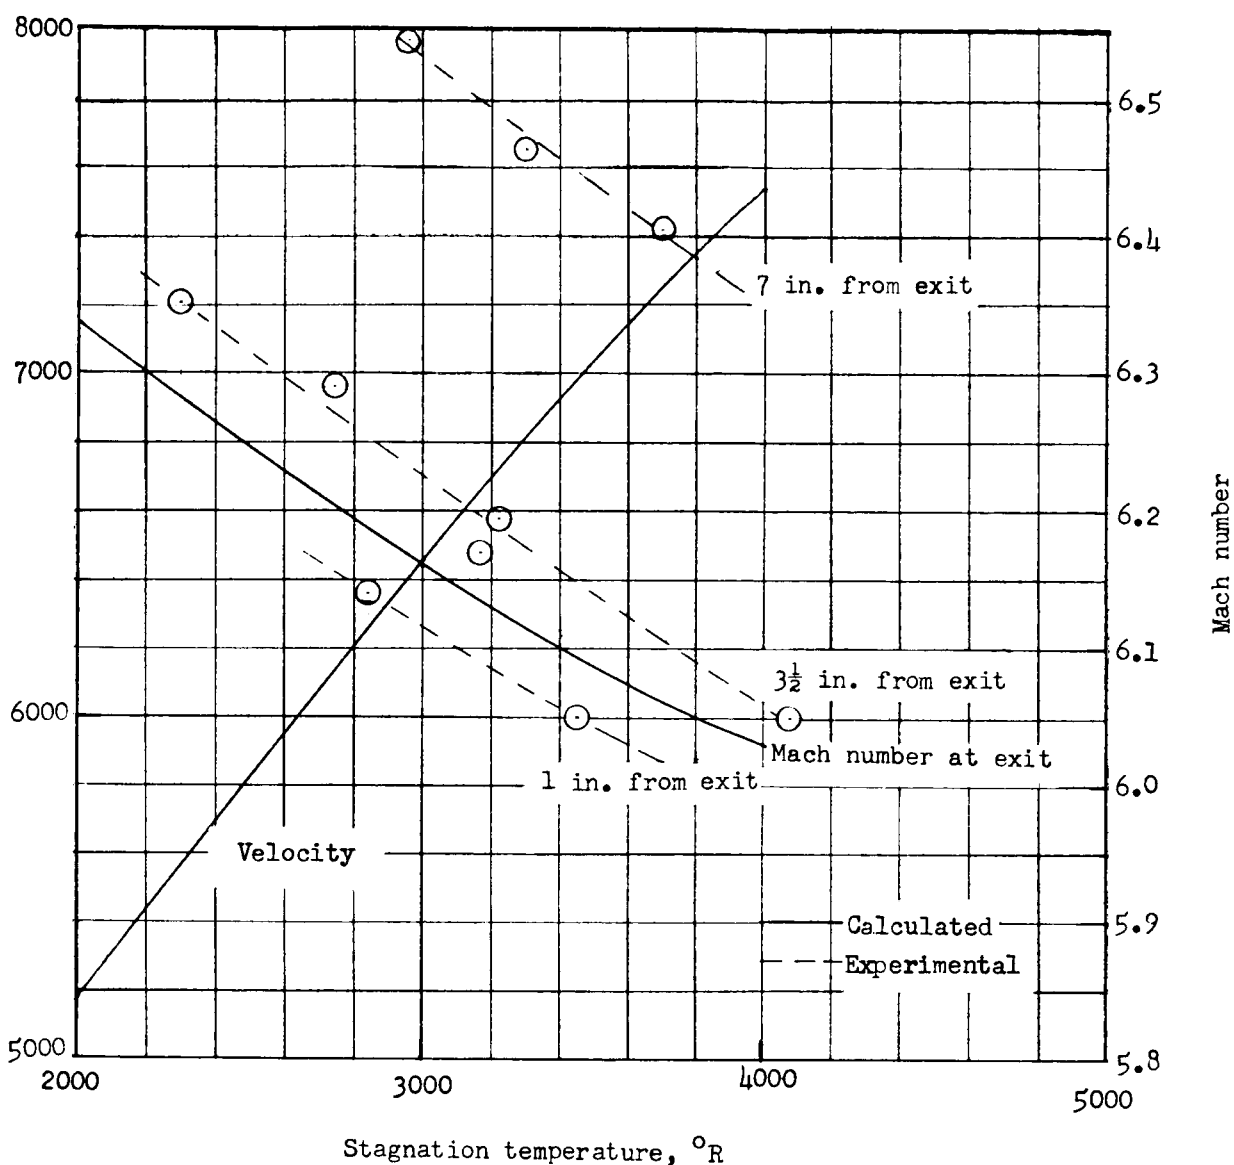Figure 23.- Shadowgraphs of flow from Mach 6 nozzle.

Figure 24.- Mach number and velocity as a function of stagnation temperature for Mach 6 nozzle.

Figure 24 presents calculated velocity and Mach number as a function of stagnation temperature. Experimentally determined values of Mach number are also presented as a function of distance from the exit of the nozzle. Flow from the conical nozzle continues to expand and increase in Mach number beyond the nozzle exit.
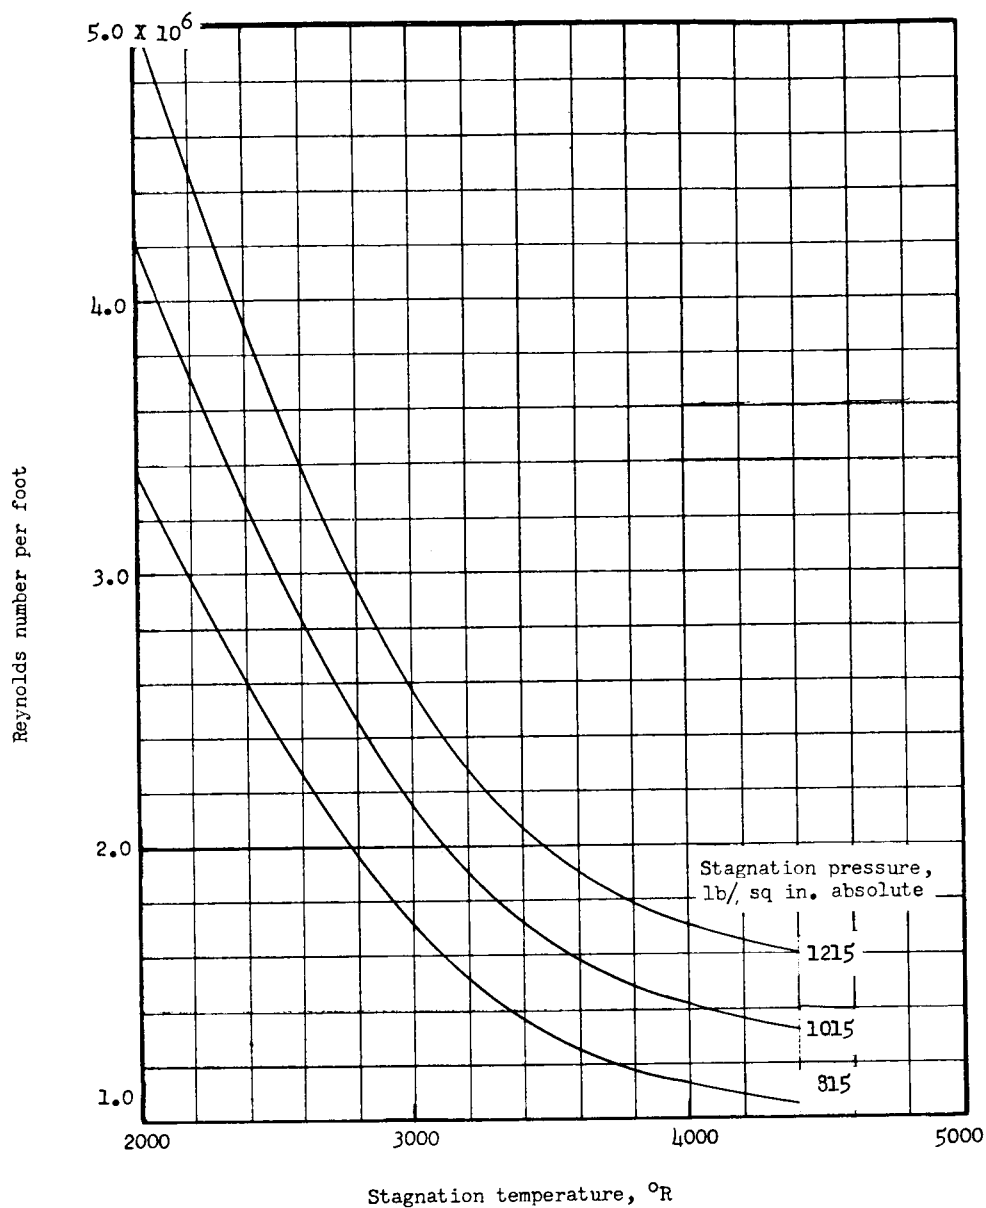
Figure 25.- Variation of free-stream Reynolds number per foot as a function of stagnation temperature for Mach 6 nozzle.

Figure 25 presents calculated Reynolds number as a function of stagnation temperature for 815, 1,015, and 1,215 lb/sq in. stagnation pressures. Reynolds number varies from 5×10^6 at 1,215 lb/sq in. absolute and 2,000° R to 1.12×10^6 at 815 lb/sq in. absolute and 4,000° R at distances 1 inch from the exit on the center line.

Figure 26 presents calculated free-stream static pressure and temperature inch beyond the exit of the nozzle) as a function of stagnation temperature.
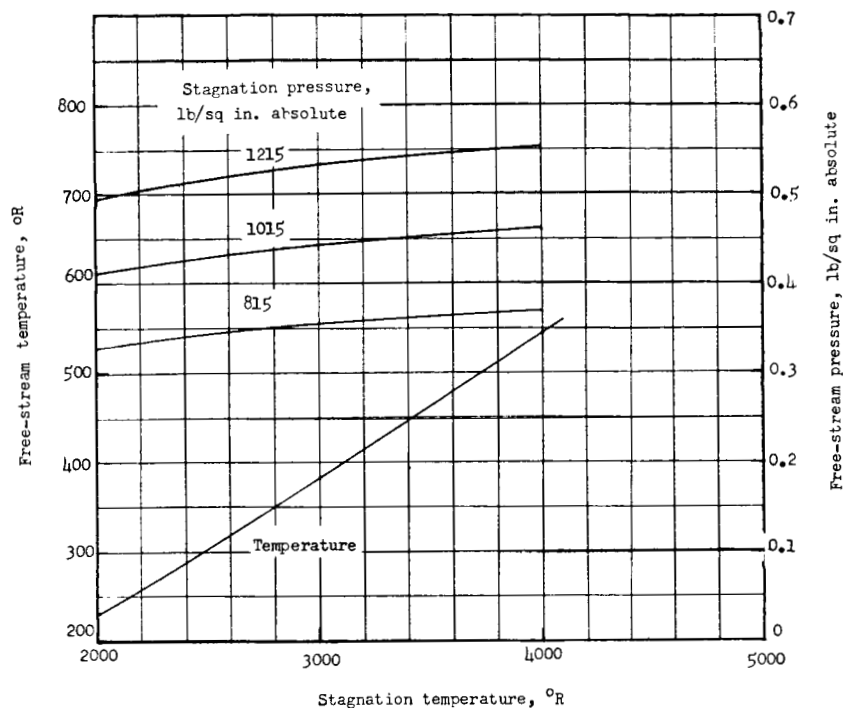
Figure 26.- Free-stream static pressure and static temperature as a function of stagnation temperature for Mach 6 nozzle.

Figure 27 presents the heating parameter $h\sqrt{D}$ at the stagnation point of a hemisphere as a function of stagnation temperature as calculated by methods presented in reference 23.
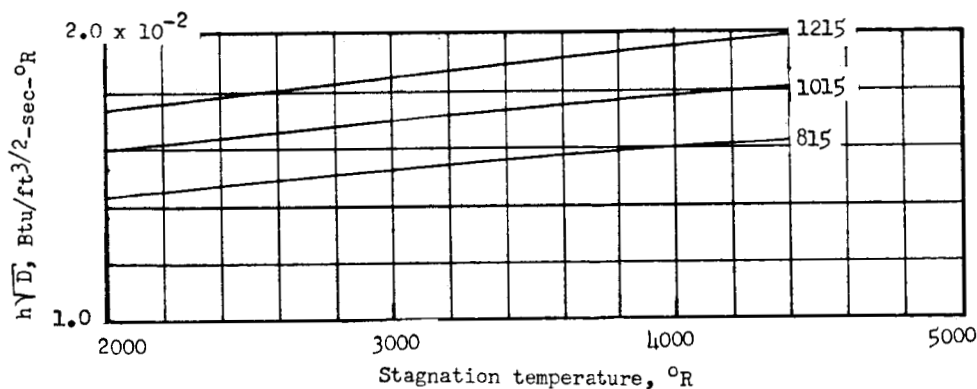
Figure 27.- Variation of heating rate at stagnation point of hemisphere as a function of stagnation temperature for Mach 6 nozzle.

The results of this program to develop high-temperature research facilitie
utilizing a ceramic heat exchanger may be concluded as follows:

1. The concepts applied in the development of a 4,500° R ceramic heat
exchanger for wind-tunnel application have proved practical. A facility com-
prising a 4,500° heat exchanger has been successfully designed, constructed, an
used for testing.

2. A Mach 4 free jet and an 11-inch Mach 6 tunnel system have been develop
to operate from the ceramic heat exchanger for materials and heat-transfer
research and aerodynamic testing. The zirconia heat exchanger provides a prac-
tical means for heating air to 4,000° R for research facilities. Contamination
of the heated air by small amounts of zirconia dust limits the usefulness of th
facility for refined materials testing.

3. Water-cooled nozzles have been developed and successfully employed on t
ceramic-heated tunnels.

4. A simple premixed propane-air-oxygen burner system which is capable of
heating of the ceramics to over 4,500° R has been developed. The system provid
clean, easily controllable combustion over the entire operating range.

Langley Research Center,
    National Aeronautics and Space Administration,
        Langley Station, Hampton, Va., October 16, 1962.

REFERENCES

1. Perry, John H., ed.: Chemical Engineers' Handbook. Third ed., McGraw-Hill Book Co., Inc., 1950.

2. Norton, C. L., Jr.: The Pebble Heater - A New Transfer Apparatus. Jour. American Ceramic Soc., vol. 29, no. 7, July 1946, pp. 187-193.

3. Batchelder, H. R., and Ingols, H. A.: Performance of a Pebble Heater Type Steam Superheater. Rep. of Invest. 4781, Bur. Mines, U.S. Dept. Interior, Mar. 1951.

4. Buehl, R. C., Morris, J. P., and Riott, J. P.: Pebble Stoves for Heating Gases to High Temperatures. Rep. of Invest. 4949, Bur. Mines, U.S. Dept. Interior, Mar. 1953.

5. Liu, Tung-Sheng, Sun, Ernst J. C., and Knutson, Robert K.: The Design and Performance of a Regenerative-Type Heater for an Intermittent Supersonic Wind Tunnel. WADC Tech. Rep. 56-215, ASTIA Doc. NR AD 131020, U.S. Air Force, Nov. 1957.

6. Bloom, Martin H.: A High Temperature-Pressure Air Heater (Suitable for Intermittent Hypersonic Wind-Tunnel Operation). WADC Tech. Note 55-694, ASTIA Doc. No. AD 110725, U.S. Air Force, Nov. 1956.

7. Fields, E. M., Hopko, Russell N., Swain, Robert L., and Trout, Otto F., Jr.: Behavior of Some Materials and Shapes in Supersonic Free Jets at Stagnation Temperatures up to $4,210^\circ$ F, and Descriptions of the Jets. NACA RM L57K26, 1958.

8. Hopko, Russell N., and Trout, Otto F., Jr.: Exploratory Tests of the Behavior of Several Materials in a Supersonic Air Jet at $4,000^\circ$ F. NACA RM L57E24, 1957.

9. Trout, Otto F., Jr.: Experimental Investigation of Several Copper and Beryllium Hemispherical Models in Air at Stagnation Temperatures of $2,000^\circ$ F to $3,600^\circ$ F. NASA TM X-55, 1959.

10. Norton, F. H.: Refractories. Third ed., McGraw-Hill Book Co., Inc., 1949.

11. Campbell, I. E. (ed.): High-Temperature Technology. John Wiley & Sons, Inc., c.1956.

12. Anon.: Zirconia, Bonded Refractories. CP5.5.3, Refractories Div., Norton Co., Worcester, Mass., June 30, 1955.

13. McAdams, William H: Heat Transmission. Third ed., McGraw-Hill Book Co., Inc., 1954.

14. Hogerton, J. F., and Grass, R. C., eds.: The Reactor Handbook. Vol. 2 - Engineering. AECD - 3646. U.S. Atomic Energy Commission, May 1955.

15. Brown, George Granger, Foust, Alan Shivers, et al.: Unit Operations. John Wiley & Sons, Inc., c.1950.

16. Lewis Propulsion Chemistry Division (Henry C. Barnett and Robert R. Hibbard, eds.): Basic Considerations in the Combustion of Hydrocarbon Fuels With Air. NACA Rep. 1300, 1957.

17. Bailey, A., and Wood, S. A.: The Conversion of the Stanton 3-Inch High-Speed Wind Tunnel to the Open Jet Type. Proc. Inst. Mech. Eng. (London), vol. 135, Jan.-May 1937, pp. 462-466.

18. Timoshenko, S.: Strength of Materials. Part II - Advanced Theory and Problems. Third ed., D. Van Norstrand Co., Inc., c.1956.

19. Van Driest, E. R.: The Turbulent Boundary Layer With Variable Prandtl Number. Rep. No. AL-1914, North American Aviation, Inc., Apr. 2, 1954.

20. Van Driest, E. R.: Investigation of Laminary Boundary Layer in Compressible Fluids Using the Crocco Method. NACA TN 2597, 1952.

21. Ames Research Staff: Equations, Tables, and Charts for Compressible Flow. NACA Rep. 1135, 1953. (Supersedes NACA TN 1428.)

22. Erickson, Wayne D., and Creekmore, Helen S.: A Study of Equilibrium Real-Gas Effects in Hypersonic Air Nozzles, Including Charts of Thermodynamic Properties for Equilibrium Air. NASA TN D-231, 1960.

23. Sibulkin, M.: Heat Transfer Near the Forward Stagnation Point of a Body of Revolution. Jour. Aero. Sci. (Readers' Forum), vol. 19, no. 8, Aug. 1952, pp. 570-571.